Technical Fiche - ENG



Parquet de Soignes / Batch 15 / Version 20231007

Identification of product according to EU norm NBN EN 13226

Type of product:	Hardwood parquet with tongue-and-groove and chamfer bevel		
Type of wood:	Beech (fagus sylvatica)		
Provenance of wood:	Sonian Forest in Braine l'Alleud (Bois Planté and Tasnière)		
Dimensions if elements:	16mm x 105mm x variable length		
(width x thickness x length in mm)			
Quality:	AB (see table below)		
Type of installation:	Glued or nailed. Do not use in combination underfloor heating. Prior to		
	installation consult the Installation and Maintenance Guide of this product as		
	well as NIT N°272 of the CSTC.		
Packaging	The flooring is delivered in air-tight plastic wrapping.		

Provenance


The parquet is made from beech wood harvested within 35 km from the Grand' Place of Brussels. The wood was acquired from a family estate in Braine L'Alleud, more specifically from the woods called Bois Planté and Tasnière in the winter 2022/2023.

Certification

Certified by Fedustria's Circular Interior label for its contribution to eco-conception, lifespan expansion and waste diminution (n°CHI/001).



Detailed dimensions of the product

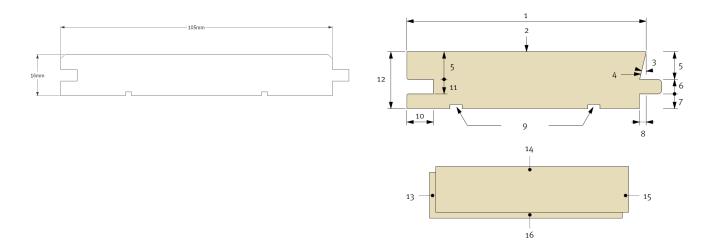

Element number	Description	Included in product	Dimension
1	Facing width	Yes	105 mm
2	Facing	Yes	
3	Upper cheek slope	Non	(0°)
4	Tilt	Non	-
5	Upper cheek thickness	Yes	6 mm
6	Tongue thickness	Yes	4,5 mm
7	Thickness of the part under the tongue	Yes	5 mm
8	Weight loss	Non	-
9	Gluing grooves	Yes	
10	Groove depth	Yes	5 mm
11	Groove height	Yes	5 mm
12	Thickness between the facing and the back facing	Yes	16 mm
13	Tongue at the end	Yes	
14	Edge groove	Yes	
15	End groove	Yes	
16	Edge tongue	Yes	
17	Chamfer	Yes	

Quality grades for tongue-and-groove beech parquet floors (European standard NBN EN 13226)

Facing of the element						
	Quality grades					
Singularities	A - O	Β - Δ	C - <u>-</u>			
Healthy sapwood	Not applicable	Not applicable	Not applicable			
Knots:	Allowed if :	Allowed if :	All singularities are permitted			
healthy and adherent	diameter ≤ 2 mm	diameter ≤ 10 mm	without limits of dimensions or			
disintegrated	diameter ≤ 1 mm	diameter ≤ 5 mm	quantities if they do not reduce the			
			resistance or wear quality of the			
Gerces	Not allowed	Allowed up to 15 mm in length	parquet.			
Between-bark	Not allowed	Not allowed				
Lightning struck	Not allowed	Not allowed				
Grain slope	Allowed without limit	Allowed without limit	7			
Colour variations	Moderate colour variations allowed,	Allowed	7			
	moderate natural discoloring					
	allowed.					
Red duramen	Not allowed	Allowed	7			
Traces of drying sticks	Not allowed	Allowed				
Medullary rays	Allowed	Allowed				
Biological alterations	Not allowed	Not allowed	Not allowed, with the exception of			
			blue stain and blackening.			
Non-visible parts						
All singularities are permitted without limits of dimensions or quantities if they do not reduce the resistance or wear quality of the parquet.						