


ADJUSTABLE PEDESTAL PV 5/8

TECHNICAL DATASHEET

SPECIFICATIONS

The PV 5/8 is an adjustable pedestal with a range of 50–80mm/ 1,97-3,15". This pedestal is adjustable by its screw clamping system and consists of two pieces. All top plates and accessories for use with the Comfort range can be placed on this pedestal. The bottom piece has eight vertical reinforcement ribs and 4 holes. The top piece of the Comfort pedestal has eight blocking ribs.

Color	Black
Support area	300 cm ²
	46,50 in
Outside diameter	215 mm
	8,46 in
Weight	228 g/piece
Adjustable height	50 - 80 mm
	1,97-3,15"



Recycled material



Weatherproof



Resistant to temperatures between -25 and +70°C



PP compound



Compliant with the DTU standard 43.1 and 51.4



Capacity: 2.400 kg/m²



Tested on Broof T4 and BFL-S1

OTHER PEDESTALS



PV 2.3/3.5



PV 11/14



PV 5/8



PV 14/17



PV 8/11

PEDESTALS WALL VERSION



AK 3.5/5



AK 5/8

TOP PLATES

For tiles



C2/4T

For wood



CPV+



C3/4T

Other



CO



C6/4T



STICKSQL

ACCESSORIES

Extension piece



F30



AF100

Slope corrector



HS2



HA5

Fitting pieces



1 - 3 mm

PACKAGING

Bag

Dimensions 1.450 x 750 mm
57,09 x 29,53"

Gross weight 11,4 kg
Quantity 50 pieces/bag

Pallet

Dimensions 1.200 x 1.100 x 2.200 mm
47,24 x 43,31 x 86,61"

Gross weight 197 kg
Quantity 16 pieces/bag – 800 pieces



ADJUSTABLE PEDESTAL PV 5/8

TECHNICAL
DATASHEET

LOAD/M²

Wood


Every 600 mm l/w	1.350 kg/m ²
Every 500 mm l/w	2.400 kg/m ²
Every 400 mm l/w	3.750 kg/m ²

Tiles

600 x 600 mm (2,25 pcs/m ²)	1.350 kg/m ²
500 x 500 mm (4,00 pcs/m ²)	2.400 kg/m ²
400 x 400 mm (6,25 pcs/m ²)	3.750 kg/m ²

PRESSURE TEST (ZWICK)

1.560 kg

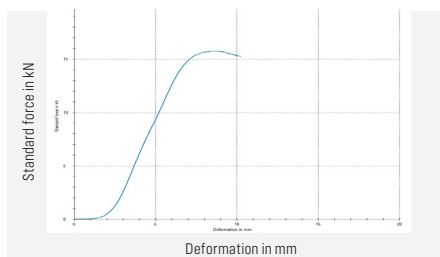

Discover here our
contribution to a sustainable
world:



The calculation is valid with proper placement and installation without extension pieces. For a taller construction with extension pieces, these results are not applicable. A minimum of 1.5 threads must be threaded into the pedestal.



Made in Belgium