


FOCUS+ ZERO S/EW

Part number 304611

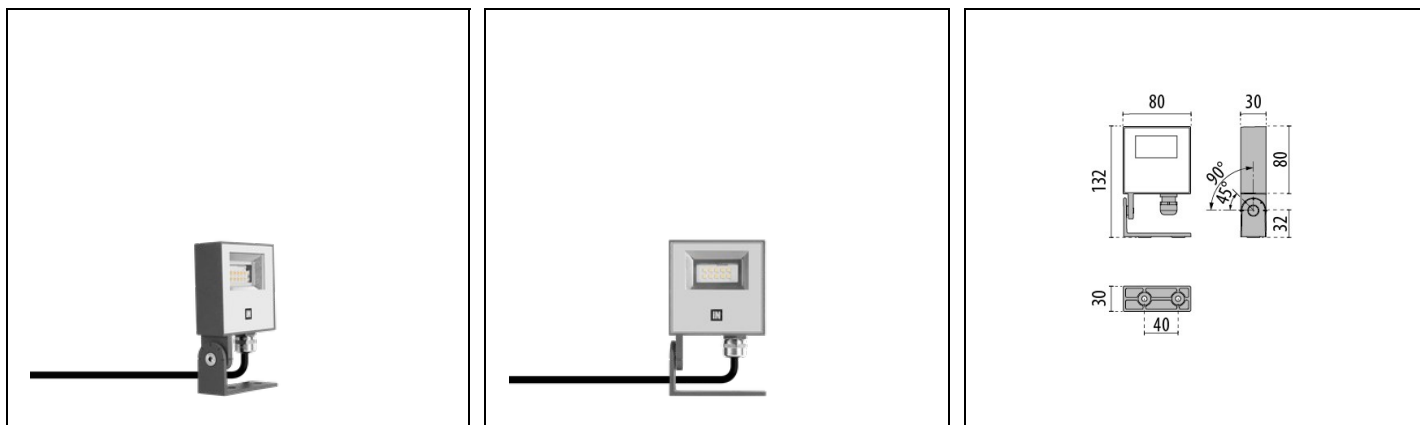

Description

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Adjustable mounting bracket made of die-cast aluminium, painted
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside
- Aluminium reflector
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Stainless steel locking hardware
- Waterproof cable gland M16x1.5 for cables \varnothing 5- \varnothing 10 mm
- Complete with 1 m factory pre-wired cable H05RN-F 3G1 mm²

Product data

ETIM Group:	EG000027	ETIM Class:	EC001744
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1485	Luminaire lumen output [lm]:	1106.61
Luminaire wattage [W]:	9.5 W	Luminous efficacy [lm/W]:	116
CRI:	80	Colour temperature [K]:	4000
Colour / Finishing:	AN-g6 / Anthracite gray / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK06 1J xx3	Protection class:	I
Optic:	S/EW - Symmetric Extra-Wide	Net weight [kg]:	0.4
Overall length [mm]:	80	Overall width [mm]:	132
Overall height [mm]:	30		

Mechanical features

Shape:	Square \leq 150 mm	Housing material:	Aluminium
Diffuser material:	Glass	Top exposed area [m ²]:	0.01

Electrical features

Voltage type:	AC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	50/60	Power factor / COS Φ :	>0.9
Inrush current [A/ μ s]:	2 / 135	C10 1.5 mm ² :	66
C16 2.5 mm ² :	86	B10 1.5 mm ² :	41
B16 2.5 mm ² :	66		


Installation

Application area:	Outdoor	Mounting type:	Feature Spot Lights
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	40
Min. distance from lighted object [m]:	0.10		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@66800h
Distribution of light emission:	Direct	Zero light pollution (ULR = 0%):	

Photometric data

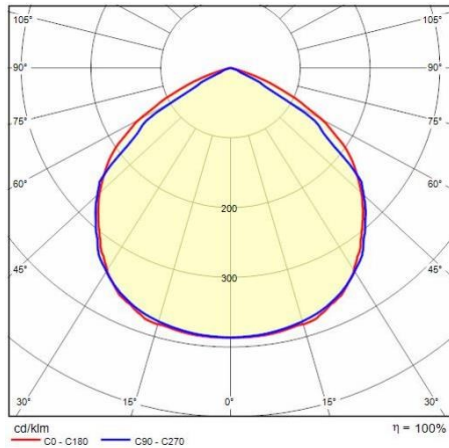

Optional accessories

FOCUS+ ZERO - FOCUS+ ZERO KIT

**310496**Connection Kit Y 3-way Ø 7-10,5 mm
IP68**310495**Connection Kit Y 3-way Ø 14-17 mm
IP68